



## DS-2CD2010-I 1.3MP IR Mini Bullet Camera

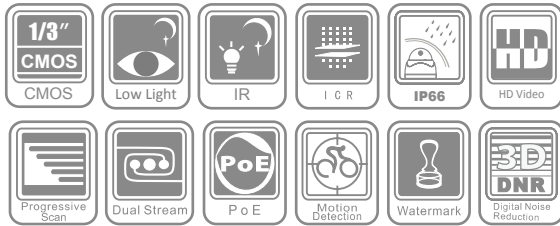

### Key features

- 1.3 megapixel high resolution
- HD real-time video
- 3D DNR & DWDR & BLC
- IR LEDs: up to 30m
- IP66
- PoE
- Compact design

### Dimensions

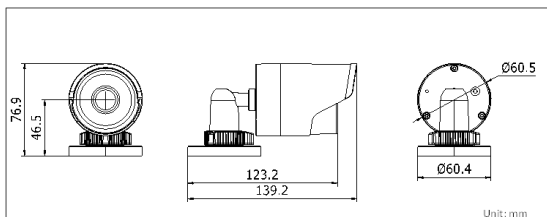

| DS-2CD2010-I                |                                                                                                                                                                          |
|-----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Camera</b>               |                                                                                                                                                                          |
| Image sensor                | 1/3" progressive scan CMOS                                                                                                                                               |
| Min. illumination           | 0.01 lux @F1.2, AGC ON, 0 lux with IR                                                                                                                                    |
| Shutter time                | 1/25s (1/30s) ~ 1/100,000s                                                                                                                                               |
| Lens                        | 4mm @F2.0, angle of view: 69.4° (6mm, 12mm optional)                                                                                                                     |
| Lens mount                  | M12                                                                                                                                                                      |
| Day & night                 | IR cut filter with auto switch                                                                                                                                           |
| Digital noise reduction     | 3D DNR                                                                                                                                                                   |
| Wide dynamic range          | Digital WDR                                                                                                                                                              |
| <b>Compression Standard</b> |                                                                                                                                                                          |
| Video compression           | H.264 / MJPEG                                                                                                                                                            |
| H.264 codec profile         | Main profile                                                                                                                                                             |
| Bit rate                    | 32 Kbps ~ 16 Mbps                                                                                                                                                        |
| Dual stream                 | Yes                                                                                                                                                                      |
| <b>Image</b>                |                                                                                                                                                                          |
| Max. Image Resolution       | 1280 × 960                                                                                                                                                               |
| Frame rate                  | 50Hz: 25fps (1280 × 960), 25fps (1280 × 720), 25fps (704 × 576), 25fps (640 × 480)<br>60Hz: 30fps (1280 × 960), 30fps (1280 × 720), 30fps (704 × 576), 30fps (640 × 480) |
| Image settings              | Saturation, brightness, contrast, sharpness adjustable through client software or web browser                                                                            |
| BLC                         | Yes, zone configurable                                                                                                                                                   |
| <b>Network</b>              |                                                                                                                                                                          |
| Network storage             | NAS (iSCSI optional)                                                                                                                                                     |
| Alarm trigger               | motion detection, tampering alarm                                                                                                                                        |
| Protocols                   | TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6, Bonjour (SIP optional)                          |
| Interoperability            | ONVIF, PSIA, CGI                                                                                                                                                         |
| Security                    | User Authentication, watermark, reset button                                                                                                                             |
| <b>Interface</b>            |                                                                                                                                                                          |
| Communication interface     | 1 RJ45 10 M / 100 M Ethernet interface                                                                                                                                   |
| <b>General</b>              |                                                                                                                                                                          |
| Operating conditions        | -30 °C ~ 60 °C (-22°F ~ 140 °F) humidity 95% or less (non-condensing)                                                                                                    |
| Power supply                | 12 VDC ± 10% , PoE (802.3af)                                                                                                                                             |
| Power consumption           | max. 5W (max. 7W with ICR on)                                                                                                                                            |
| Weather proof rating        | IP66                                                                                                                                                                     |
| IR range                    | Up to 30m                                                                                                                                                                |
| Dimension                   | 60.4 x 76.9 x 139.2mm                                                                                                                                                    |
| Weight                      | 500g (1.1 lbs)                                                                                                                                                           |

### Available model

DS-2CD2010-I

\* Product picture and technical specs subject to change without previous notice. For further information, please contact our local sales team.